


ADAPTA FIL™

Semi-Automatic Benchtop

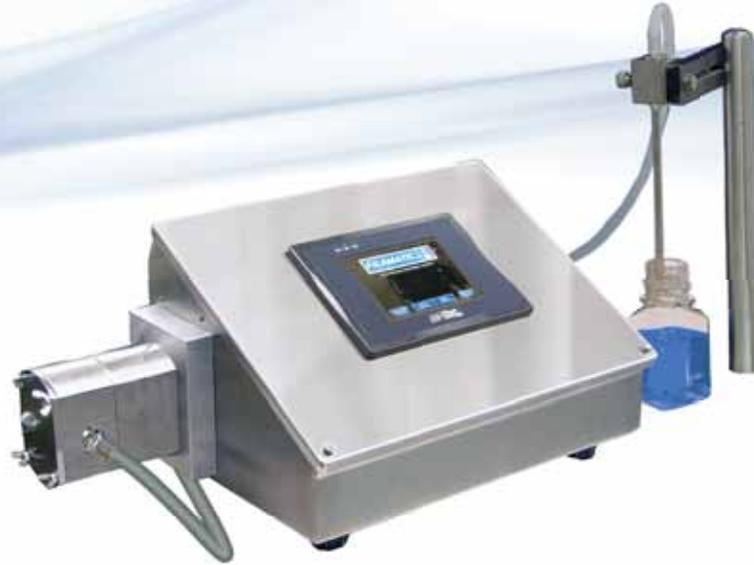

**One Base with Four Interchangeable Pumps For Maximum Flexibility:
Piston, Gear, Lobe, or Peristaltic**

- 💧 HMI Touchscreen
- 💧 Servo Motor Driven Technology
- 💧 Digitally Controlled- No Manual Adjustments
- 💧 Recipe Recall that allows you to Create, Save, and even Copy 100+ Recipes by Name
- 💧 Advanced Fill Weight Compensation
- 💧 Adjustable Batch Counting
- 💧 Clean Room Design
- 💧 Solutions for OEM Integration


ADAPTAFIL™

Specifications

Metering Systems	Fill Volume Range/Rates		Product Description
Peristaltic	Up to 1.16 gallons/min	4.37 liters/min	Free Flowing
Gear	Up to 3.5 gallons/min	13.25 liters/min	Free Flowing Semi-Viscous Viscous Particulates
Lobe	Up to 4 gallons/min	15.14 liters/min	Free Flowing Semi-Viscous Viscous Particulates
Piston	.3 mL to 260 mL per stroke	35 strokes/min	Free Flowing Semi-Viscous

Additional ADAPTAFIL™ Features:

- 💧 Tool-less Changeover
- 💧 110 V Power
- 💧 Stainless Steel Cabinet
- 💧 Quick Clean-Up
- 💧 Fill Accuracy $\pm 0.5\%$ Depending Upon Metering Pump Selected
- 💧 Modular Design with Built-In Expansion Capability

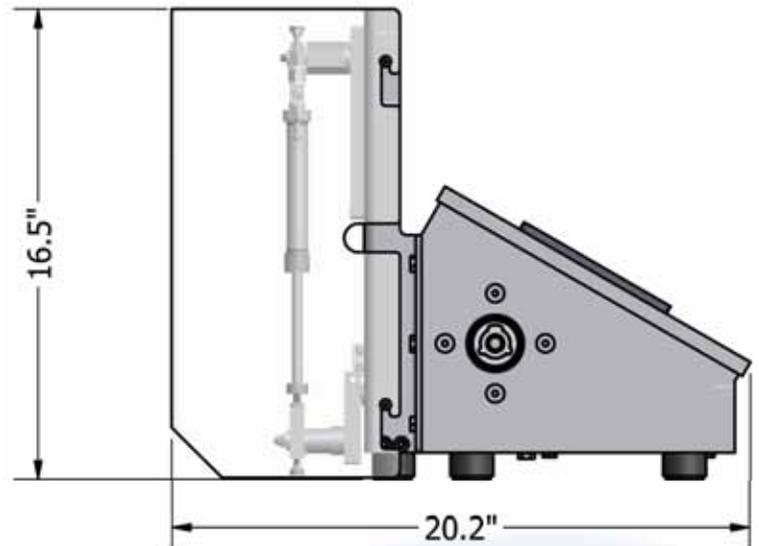

Filamatic offers **COMPLIMENTARY** product testing and will provide support before, during, and after the sale of your Benchtop. For more information call 866.258.1914 or email info@filamatic.com.

